


Technical data sheet

PUR motor cables · C-track compatible · shielded

LUTZE SUPERFLEX® PLUS (C) PUR 0.6/1kV

For highest requirements

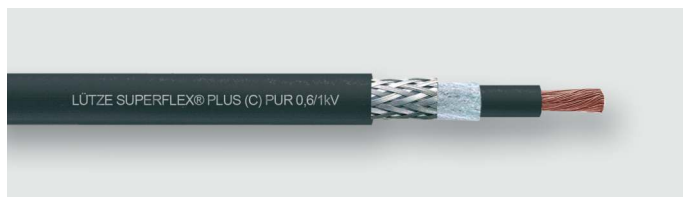

Identification

Type SU+ (C) PUR (1×6) 1kV SW
Part No. [111288](#)

Product version

Datasheet version 00

Use/Application/Properties

- | | |
|-------------|--|
| Application | <ul style="list-style-type: none">• Performance conductor, specifically for machine and device engineering, transport and conveyor technology• As motor supply or grounding cable• Compatible with all major drag chain brands• Compliant with NFPA 79, Article 12.9• Through full PUR jacket and TPE conductor insulation optimally suited, extremely harsh operating conditions, aggressive coolants and lubricants |
| Properties | <ul style="list-style-type: none">• Very good alternating bending strength• Low adhesion, abrasion-resistant, nick-resistant, tear-resistant• Hydrolysis-resistant, microbe-resistant, and rot-resistant• Weathering, ozone and UV resistant (normal lighting conditions)• Industrial and salt water resistant• Excellent coolant and lubricant resistance• Largely resistant to oils, greases, alcohol-free benzines and kerosene• Silicone free |

Construction

Description	SUPERFLEX® PLUS (C) PUR 0.6/1 kV
Number of conductors/cross-section	(1×6)
Number of conductors	1
Cross-section, metric	6 mm ²
Cross-section AWG	AWG 10
Jacket material	PUR
Jacket color	black similar to RAL 9005

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0
www.lutze.com • sales.gb@lutze.co.uk

Germany: Friedrich Lütze GmbH

Postfach 12 24 (PLZ 71366) • Bruckwiesenstraße 17-19 • D-71384 Weinstadt
Tel. +49 (0)7151 6053-0
www.luetze.de • info@luetze.de

Technical data sheet

PUR motor cables · C-track compatible · shielded

Outer Ø	7.7 mm
Outer Ø	0.303 inch
Surface	adhesion-free
Weight	11.5 kg/100 m
Weight	77 Lbs/Mft
Cu-Index	7.7 kg/100 m
Cu-Index	52 Lbs/Mft
Cable construction	With CU shield, black

Construction Element 1

Element construction	(1×6)
Conductor	CU-wire bare
Conductor category	IEC 60228, Class 6 Superfinely stranded DIN VDE 0295 Class 6
Conductor marking standard	DIN VDE 0293
Conductor insulation	Special TPE

Overall construction

Overall shield	Braid shield Tinned copper wires Optical cover approx. 85 %
Jacket characteristics	Flame-retardant Oil resistant Grease-resistant Petrol-resistant (alcohol-free) Kerosene-resistant Silicone free Halogen free

Technical data

Rated voltage U_0/U	600/1000 V
Test voltage type	AC 4000 V
Temperature range moving	-25 °C ... +80 °C
Temperature range fixed	-40 °C ... +80 °C
Minimum bending radius moving	7.5×D
Minimum bending radius fixed	6×D
Bending cycles	≥10 Mio
Speed	300
Acceleration	50 m/s ²
Torsion	± 30°/m

Technical Data Element 1

Element construction	(1×6)
Insulation resistance at 20 °C	≥200 MΩ×km
Operating capacitance wire-shield	approx.455 pF/m

Technical data sheet

PUR motor cables · C-track compatible · shielded

Certifications/Standards

Certifications	cURus
UL style	AWM 10587
Conformity	CE RoHS REACH TSCA
Burning behavior according to	VDE 0482-332-1-2 DIN EN 60332-1-2 IEC 60332-1 UL 1581 cable flame UL FT1
Oil resistant according to	UL 4d100C VDE 0282 T 10 DIN EN 60811-404
Halogen free according to	DIN EN 60754-1 IEC 60754-1

General

Note	CE These products are in conformity with the EU Low Voltage Directive 2014/35/EU
------	--