

Technical data sheet

Mounting Accessories

USB Service cable



Identification

Type	LCON ZB USB
Part No.	750894

Product version

Datasheet version	02
-------------------	----

Description

Description	USB interface cable for parameterization of FDT/DTM capable LCON converters, time relays, etc.
-------------	--

General

Status indication	LED green - status operation
Housing material	ABS
Color of the housing	transparent
Cable length	1.7 m
Connection type	USB A – Micro USB
Dimensions (w × h × d)	82.0 mm × 12.5 mm × 21.0 mm
Weight/unit	0.047 kg
PU (units)	1

General ambient conditions

Operation temperature range	-25 °C ... +70 °C
Storage temperature range	-40 °C ... +85 °C
Relative air humidity	10 % – 95 %, without condensation
Vibration resistance	0.7 g acc. to EN 60068-2-6
Shock resistance	15 g acc. EN 60068-2-27

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk

Germany: Friedrich Lütze GmbH

Postfach 12 24 (PLZ 71366) • Bruckwiesenstraße 17-19 • D-71384 Weinstadt
Tel. +49 (0)7151 6053-0 • Fax +49 (0)7151 6053-277(-288)
www.luetze.de • info@luetze.de

07.07.2022 • Subject to technical modification

Part No. [750894](#) • Datasheet version: 02

page 1 of 2

Technical data sheet

Mounting Accessories

Certifications/Standards

Conformity	CE UKCA
Standards	EN 60947-1 EN 60947-5-1


Equipment/Spare parts

Accessories	Driver software "LCON ZB USB Driver"
-------------	--------------------------------------

Notes and Comments

Note	The LCON USB service cable contains a galvanically isolated USB interface. To program parameterizable devices, you need the software "LCON ZB USB Driver", which is available free of charge in the download area. The software consists of the frame application Pactware, the DTM drivers, the driver for the service cable and a manual. Please also observe the operating instructions enclosed with the product.
------	--

Dimensions

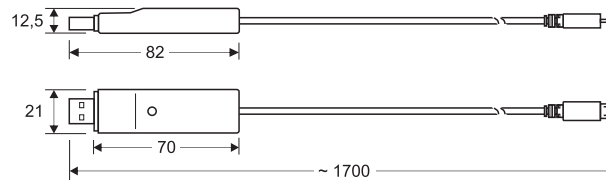

Use

