

Technical data sheet

Cable fittings and accessories

LÜTZE CABLEFIX® Vario

Feed-through for all prefabricated cables and wires with connectors



Identification

Type	VARIO AKLR0
Part No.	606038

Product version

Datasheet version	02
-------------------	----

Use/Application/Properties

- | | |
|-------------|--|
| Application | <ul style="list-style-type: none">• Electrotechnology, pneumatics, hydraulics, robotics, general machine and plant construction |
| Properties | <ul style="list-style-type: none">• High flexibility in the application• Additional mounting to existing installation easily possible• Even pressure effect on the feed through round material yields good strain relief and sealing• Unneeded holes in the module can simply with blank plugs• Compact design i.e. space-saving• 2 module sizes with slot and suspension principle• Very good weathering resistance• Pass-through and clamping frames made from high-quality, precision-machined aluminum alloy• With a flat gasket |

Technical data

Dimensions (w × h × d)	68.0 mm × 68.0 mm × 30.0 mm
Master gauge for holes	Drilling diameter 6.5 mm Hole dimensions 30×55
Number of rubber modules VG=40×43.5 mm	1

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk

Germany: Friedrich Lütze GmbH

Postfach 12 24 (PLZ 71366) • Bruckwiesenstraße 17-19 • D-71384 Weinstadt
Tel. +49 (0)7151 6053-0 • Fax +49 (0)7151 6053-277(-288)
www.luetze.de • info@luetze.de

20.10.2023 • Subject to technical modification

Part No. [606038](#) • Datasheet version: 02

page 1 of 4

Technical data sheet

Cable fittings and accessories

Number of rubber modules	2
VK=40×22.9 mm	
With flat seal and drilling template	Yes
Temperature range	-40 °C ... +100 °C
Degree of protection	IP65

Construction

Description	LÜTZE CABLEFIX® VARIO AKLR0
Material	AlMgSi0,5
Material characteristics	Flame-retardant


General

PU (units)	1
------------	---

Notes and Comments


Note	For cable and wire diameters from 4 mm to 34,5 mm.
------	--

Dimensions

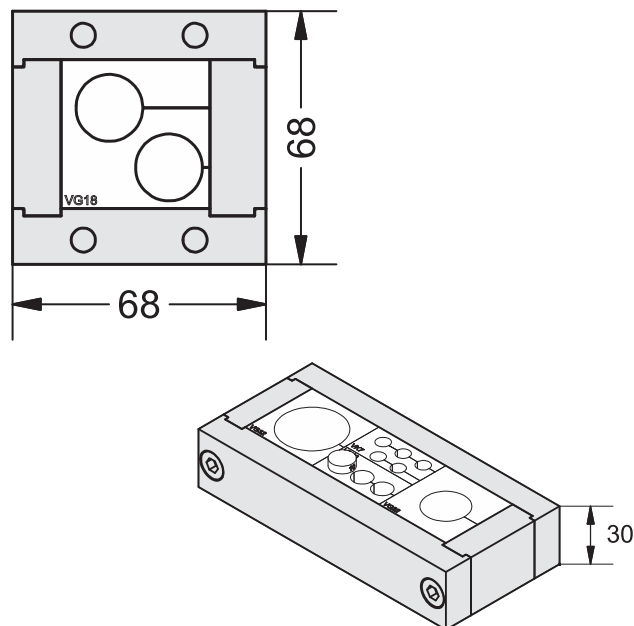


Use



606038 VARIO AKLR0




606001 VARIO AKLR1




606002 VARIO AKLR2

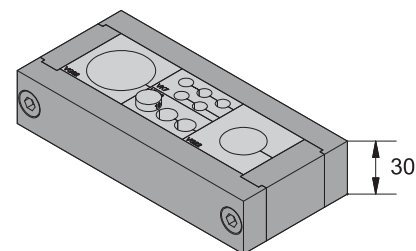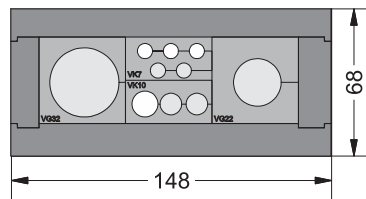


606005 VARIO AKLR5

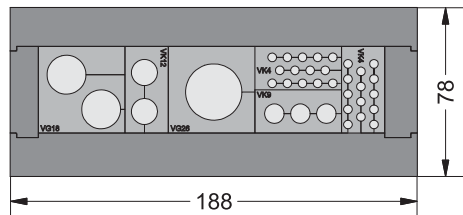

606007 VARIO AKLR7

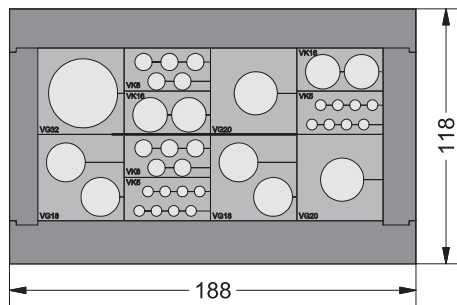

Use

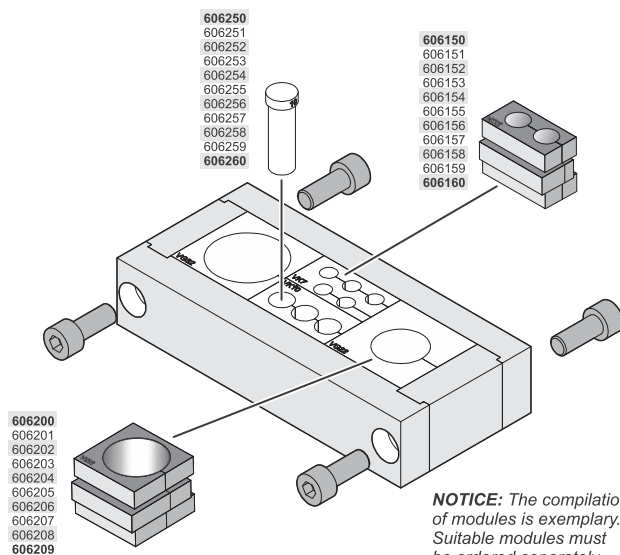

NOTICE: The compilation of modules is exemplary. Suitable modules must be ordered separately.

Technical data sheet

Cable fittings and accessories

Drilling pictures

