

Technical data sheet

Ethernet · Unmanaged PoE+ switches, 4 ports, Ethernet, 10/100/1000 MBit/s, 1 Gbit copper port and 1 SFP-port

Industrial 4-Port 10/100/1000T 802.3at PoE+, 1-Port 10/100/1000T + 1-Port 100/1000X SFP Gigabit Ethernet Switch

QoS - Quality of Service, PROFINET Conformance Class A, compact design

Redundant supply, extended temperature range, jumbo frames up to 9kB



Identification

Type ET-SWGU4FP
Part No. [772009](#)

Product version

Datasheet version 03

Description

Description Industrial 4-Port 10/100/1000T 802.3at PoE+, 1-Port 10/100/1000T + 1-Port 100/1000X SFP Gigabit Ethernet Switch

Communication

Standard	IEEE 802.3, 802.3u, 802.3x, 802.3af, 802.3ab IEEE 802.3az Gigabit SX/LX IEEE 802.3az Energy Efficient Ethernet (EEE) IEEE 802.3at Power over Ethernet Plus PSE IEEE 802.1p Class of Service
LAN	10/100/1000 Base-T RJ45 Auto-MDI/MDI-X, Auto Negotiation
Cable length (segment)	Max. 100 m
Transfer rate	max. 1000 Mbit/s
Connection technology (data)	5 × RJ45, 1 × SFP (mini-GBIC)
Throughput (packet per second)	8.93 Mpps @ 64 bytes

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0
www.lutze.com • sales.gb@lutze.co.uk

Germany: Friedrich Lütze GmbH

Postfach 12 24 (PLZ 71366) • Bruckwiesenstraße 17-19 • D-71384 Weinstadt
Tel. +49 (0)7151 6053-0
www.luetze.de • info@luetze.de

07.04.2025 • Subject to technical modification

Part No. [772009](#) • Datasheet version: 03

page 1 of 6

Technical data sheet

Ethernet · Unmanaged PoE+ switches, 4 ports, Ethernet, 10/100/1000 MBit/s, 1 Gbit copper port and 1 SFP-port

Status display communication	System: Power 1 (P1): green Power 2 (P2): green Alarm, (Fault): red Per 10/100TX RJ45 Ports: 10/100 LNK/ACT: green 100/1000 LNK/ACT: orange (/amber)
Switch architecture	Store-and-Forward
Jumbo Frame	9K
Shared data buffer	4 Mbit/s
Source Address Table	2K inputs, automatic source address learning and aging
FLOW Source	EEE 802.3x pause frame for full-duplex Back pressure for half-duplex
Switch Fabric	10 Gbps (non-blocking)

Safety

ESD (Ethernet)	DC 6 kV
Surge (EFT for power)	DC 4 kV
Reverse voltage protection	Yes

Monitoring

Power supply voltage monitoring	Relay, 1 normally open
Switching current	1 A @ DC 24 V
Switching voltage	AC 120 V / DC 28 V
Isolation voltage	DC 500 V

General

Rated current	139 W, DC: max. 7 A
Operation voltage range	DC 12–54 V, redundant
Power consumption	139 W full load Ethernet + PoE+
Power output	36 W @ 54 V (per PoE+ port)
Degree of protection	IP40
Relative humidity (operation)	5 % – 90 % (non-condensing)
Relative humidity (storage)	5 % – 90 % (non-condensing)
Housing material	Metal
Mounting	DIN rail mountable TS35 (EN 60715)
Installation position	Any
Connection type	6-pole pluggable screw terminal for power supply and fault diagnosis Single wire/fine wire 0.25 mm ² – 2.5 mm ² AWG 20 – AWG 14 Fine stranded wire with ferrule 0.25 mm ² – 1.5 mm ² AWG 20 – AWG 16
MTBF	>100000 h
Dimensions (w × h × d)	50.0 mm × 135.0 mm × 87.0 mm
Weight/unit	0.623 kg

Technical data sheet

Ethernet · Unmanaged PoE+ switches, 4 ports, Ethernet, 10/100/1000 MBit/s, 1 Gbit copper port and 1 SFP-port

PU (units) 1


General ambient conditions

Operation temperature range -40 °C ... +75 °C
Storage temperature range -40 °C ... +75 °C

Certifications/Standards

Conformity CE
UKCA
Certifications FCC Part 15 Class A
cULus (E332878)
Standards EN 55024
EN 55032
EN 55035
IEC 61000-4-2/3/4/5/6/8
IEC 60068-2-27
IEC 60068-2-32
IEC 60068-2-6


Dimensions

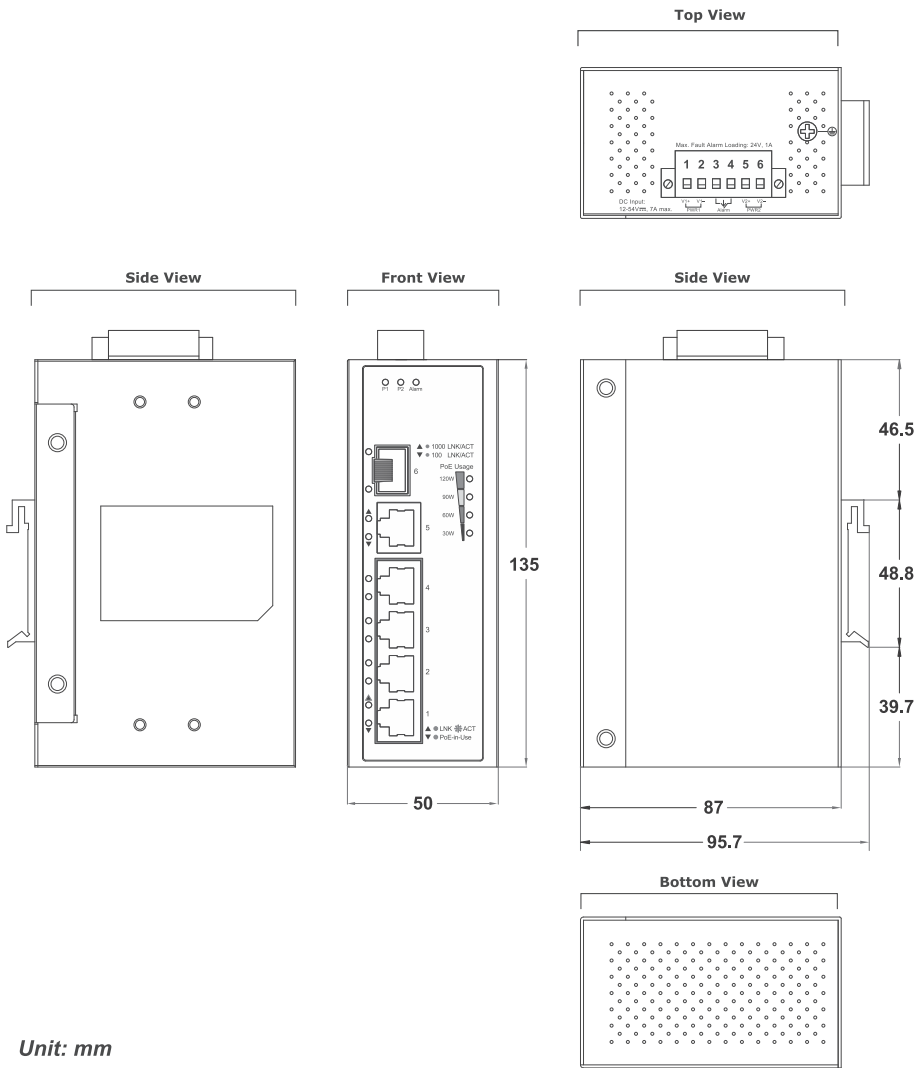


Technical data sheet

Ethernet · Unmanaged PoE+ switches, 4 ports, Ethernet, 10/100/1000 MBit/s, 1 Gbit copper port and 1 SFP-port


PIN assignment

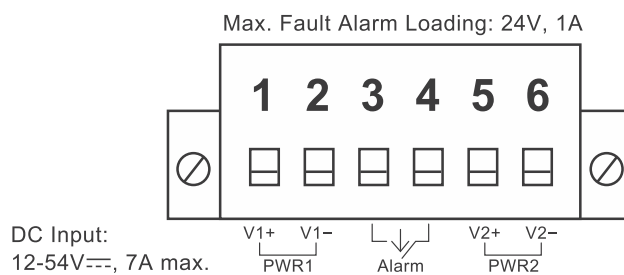

Use

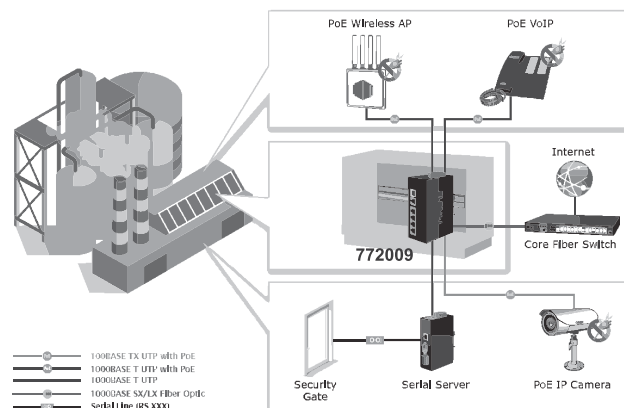


Use

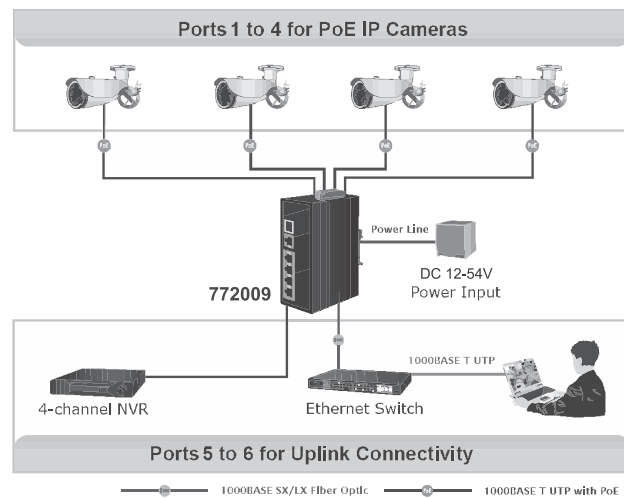


Technical data sheet

Ethernet · Unmanaged PoE+ switches, 4 ports, Ethernet, 10/100/1000 MBit/s, 1 Gbit copper port and 1 SFP-port

Use

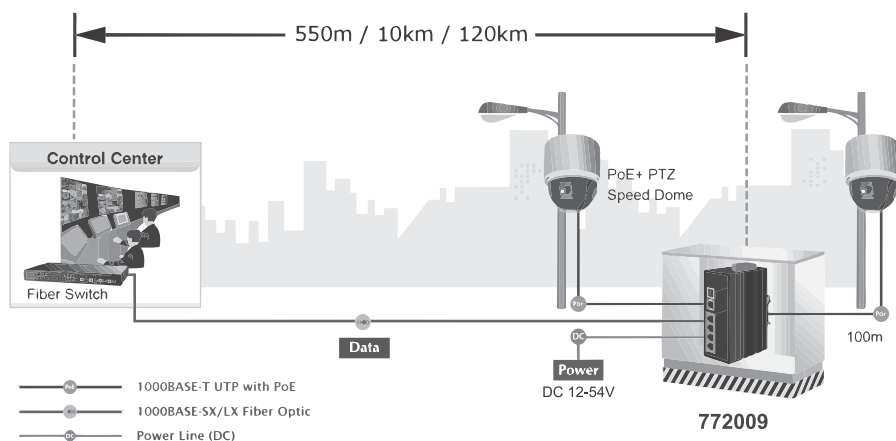

Action chart

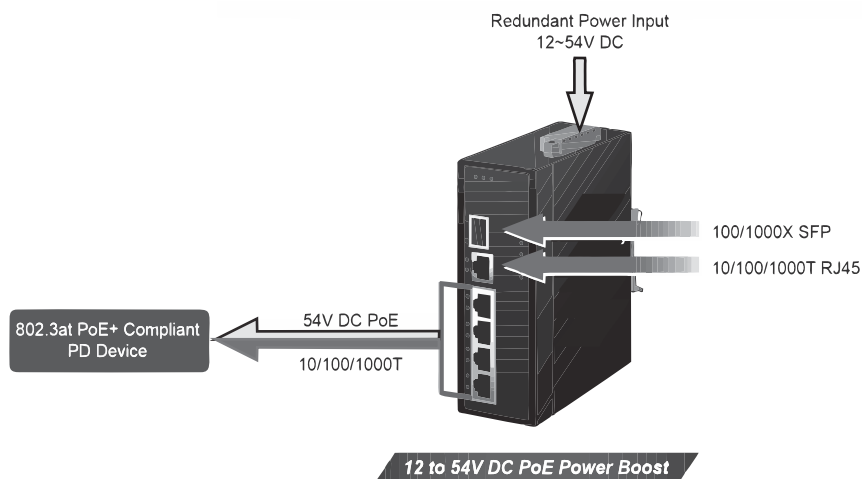

Technical data sheet

Ethernet · Unmanaged PoE+ switches, 4 ports, Ethernet, 10/100/1000 MBit/s, 1 Gbit copper port and 1 SFP-port

LED status

LED Indicators

■ System

LED	Color	Function
P1	Green	Lights to indicate power 1 has power.
P2	Green	Lights to indicate power 2 has power.
Alarm	Red	Lights to indicate either power 1 or power 2 has no power.

■ PoE Power Usage (Unit: Watt)

LED	Color	Function
30W	Amber	Off to indicate the PoE usage is less than 14W. Blinks to indicate that the PoE usage is around 15W to 29W. Lights to indicate the PoE usage is around/over 30W.
60W	Amber	Blinks to indicate that the PoE usage is around 45W to 59W. Lights to indicate the PoE usage is around/over 60W.
90W	Amber	Blinks to indicate that the PoE usage is around 75W to 89W. Lights to indicate the PoE usage is around/over 90W.
120W	Amber	Blinks to indicate that the PoE usage is around 100W to 119W. Lights to indicate the PoE usage is at the maximum.

■ Per 802.3at PoE+ 10/100/1000BASE-T Interface (Port 1 to Port 4)

LED	Color	Function
LNK/ACT	Green	Lights to indicate the link through that port is successfully established at 10Mbps or 100Mbps or 1000Mbps. Blinks to indicate that the Switch is actively sending or receiving data over that port.
PoE-in-Use	Amber	Lights to indicate the port is providing DC in-line power. Off to indicate the connected device is not a PoE powered device (PD).

■ Per 10/100/1000BASE-T Interface (Port 5)

LED	Color	Function
1000 LNK/ACT	Green	Lights to indicate the port is successfully established at 1000Mbps.
		Blinks to indicate that the Switch is actively sending or receiving data over that port.
10/100 LNK/ACT	Amber	Lights to indicate the port is successfully established at 100Mbps or 10Mbps.
		Blinks to indicate that the Switch is actively sending or receiving data over that port.

■ Per 1000BASE-X SFP Slot (Port 6)

LED	Color	Function
1000 LNK/ACT	Green	Lights to indicate the port is successfully established at 1000Mbps.
		Blinks to indicate that the Switch is actively sending or receiving data over that port.
100 LNK/ACT	Amber	Lights to indicate the port is successfully established at 100Mbps
		Blinks to indicate that the Switch is actively sending or receiving data over that port.