

Technical data sheet

Cable fittings and accessories

LÜTZE CABLEFIX® Vario

Rubber modules

Feed-through for all prefabricated cables and wires with connectors



Identification

Type	VARIO VG28
Part No.	606206

Product version

Datasheet version	02
-------------------	----

Use/Application/Properties

- | | |
|-------------|---|
| Application | <ul style="list-style-type: none">• Electrotechnology, pneumatics, hydraulics, robotics, general machine and plant construction |
| Properties | <ul style="list-style-type: none">• Rubber modules for feed through and terminal frames• High flexibility in the application• Additional mounting to existing installation easily possible• Even pressure effect on the feed through round material yields good strain relief and sealing• Compact design i.e. space-saving• 2 module sizes with slot and suspension principle• Very good weathering resistance |

Technical data

Dimensions (w × h × d)	40.0 mm × 40.0 mm × 30.0 mm
Number of holes	1
Clamping range D	26.5 – 28.5 mm
Temperature range	-40 °C ... +100 °C

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk

Germany: Friedrich Lütze GmbH

Postfach 12 24 (PLZ 71366) • Bruckwiesenstraße 17-19 • D-71384 Weinstadt
Tel. +49 (0)7151 6053-0 • Fax +49 (0)7151 6053-277(-288)
www.luetze.de • info@luetze.de

20.10.2023 • Subject to technical modification

Part No. [606206](#) • Datasheet version: 02

page 1 of 3

Technical data sheet

Cable fittings and accessories

Construction

Description	LÜTZE CABLEFIX® VARIO VK28
Material	PA6GF15
Material characteristics	UV-resistant ozone-resistant Oil resistant fuel-resistant acid-resistant. alkali-resistant solvent-resistant seawater-resistant
Color	black


General

PU (units)	1
------------	---


Notes and Comments

Note	Unit corresponds to the number of required rubber modules type VK or VG
------	---

Dimensions

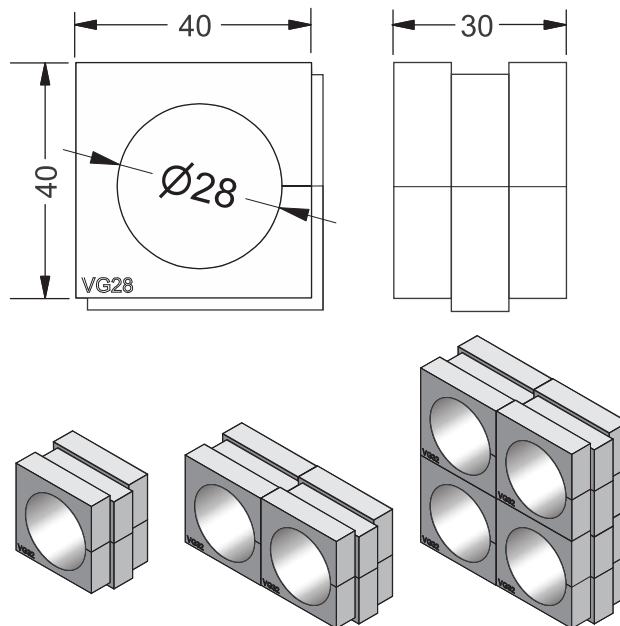


Use

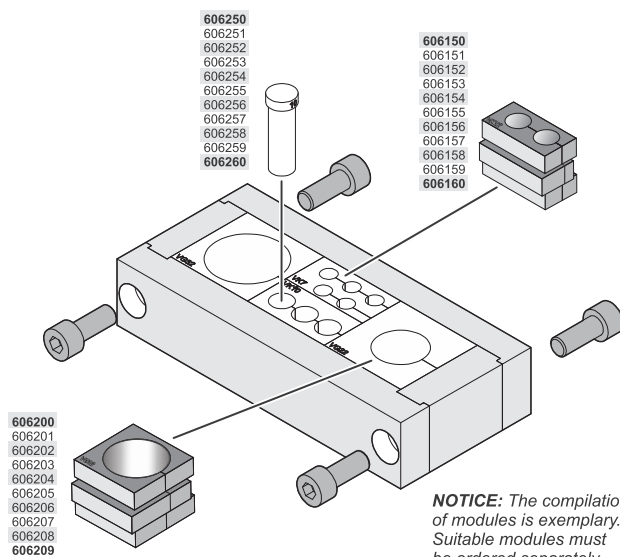


Use




606200 VARIO VG0




606201 VARIO VG18




606202 VARIO VG20




606203 VARIO VG22




606204 VARIO VG24




606205 VARIO VG26




606206 VARIO VG28



606207 VARIO VG30



606208 VARIO VG32



606209 VARIO VG34

