

Technical data sheet

Interface Technology · Microcompact temp./analog converter

Input: PT, thermocouple, potentiometer – adjustable temperature converter

Output: 0–20 mA / 4–20 mA / 0–10 V / -10–10 V / 2–10 V / 0–5 V / 1–5 V

Insulation: 2.5 kV, 3-way isolation



Identification

Type	LCON TA DFDT 806211
Part No.	751340

Product version

Hardware revision	1.2
Software version	1.8
Datasheet version	03

Input

Input variable	PT100 2/3/4 conductor PT1000 Resistor Type B Type C Type E Type J Type K Type N Type R Type S Type T
Measurement input	PT100, PT1000, resistencia, potenciómetro Thermal elements: Type B, C, E, J, K, N, R, S, T Customer-specific via support points, polynomial
Galvanic isolation I/O	3-way isolation
Step response (10–90%)	TE: 10 ms–550 ms, PT: 5–550 ms (adjustable by means of filter stage 1–5, default: filter stage 4 = 100 ms)

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0
www.lutze.com • sales.gb@lutze.co.uk

Germany: Friedrich Lütze GmbH

Postfach 12 24 (PLZ 71366) • Bruckwiesenstraße 17-19 • D-71384 Weinstadt
Tel. +49 (0)7151 6053-0
www.luetze.de • info@luetze.de

22.07.2025 • Subject to technical modification

Part No. [751340](#) • Datasheet version: 03

page 1 of 5

Technical data sheet

Interface Technology · Microcompact temp./analog converter

Temperature range	PT: -220 ... 850 °C depending on type Thermal elements: -210 ... 2310 °C depending on type
Parameterisation	Software FDT/DTM DIP switch
Input resistance	Thermocouples: 1 MΩ
Sensor current	PT, potentiometer, resistance: 0.002–0.6 mA depending on type
Circuit	PT - 2, 3, 4-wire, for 2-wire with offset correction, no external bridges necessary, autom. detection

Output

Output signal	0–10 V, -10–10 V, 0–20 mA, 4–20 mA adjustable via switch and software FDT/DTM, connection via USB service cable
Max. load impedance at I-output	700 Ω @ 0–20 mA, 4–20 mA
Max. load impedance at U-output	>2 kΩ @ 0–10 V, -10–10 V
Limitation for exceeding measurement range	10.25 V @ 0–10 V, -10–10 V 20.5 mA @ 0–20 mA, 4–20 mA
Max. modulation range/output signal/output current	10.5 V @ 0–10 V, -10–10 V 21 mA @ 0–20 mA, 4–20 mA
Parameterisation	Software FDT/DTM DIP switch

Operating data

Accuracy	PT: 10 K, divided by the set measurement range (K) + 0.2 % FSR Thermocouples: 10 K, divided by the set measurement range (K) + 0.4 % FSR
Linearity error	±0.1 % FSR

General

Rated voltage U_N	DC 24 V
Rated current	Approx. 18 mA
Status indication	LED green, red (error)
Input/output protection	Overvoltage DC 30 V, short circuit-proof output
Temperature error	<100 ppm/K FSR
Data storage	Flash
Insulation voltage input / output	2.5 kV _{eff}
Resolution	16-bit
Temperature compensation internally	Thermal elements: type ±1 K, max. ±2 K
Configuration	Switch and software: FDT / DTM
Housing material	PA 6.6 (UL 94 V-0)
Color of the housing	Light grey
Mounting	DIN rail mountable TS35 (EN 60715)
Degree of protection	IP20
Installation position	Any
Connection type	Spring terminal 0.14 mm ² – 1.5 mm ²
Dimensions (w × h × d)	6.2 mm × 90.0 mm × 115.5 mm

Technical data sheet

Interface Technology · Microcompact temp./analog converter

Weight/unit	0.05 kg
PU (units)	1

General ambient conditions

Operation temperature range	-40 °C ... +70 °C
Storage temperature range	-40 °C ... +85 °C
Relative air humidity	10 % – 95 %, without condensation
Vibration resistance	4 g acc. to EN 60068-2-6
Shock resistance	15 g acc. EN 60068-2-27

Failure Rate Prediction (MTBF)

Standards	Electronic components – Reliability – Reference conditions for failure rates and stress models for conversion: EN/IEC 61709 Failure Rates of Components – Expected values: SN 29500
Failure rate at +45 °C	678 fit
Failure rate at +45 °C	1474689 h 1 fit equals one failure per 10 ⁹ component hours The indicated temperature is the mean component ambient temperature.
Comments	The results are valid under following conditions: Automotive environment or industrial areas without extreme dust levels and harmful substances. Continuous operation 8760 h per year.

Certifications/Standards

Conformity	CE UKCA
Certifications	cULus (E135145) cULus (E319134) use in Class I, Div. 2, Hazardous Locations
Standards	EN 60947-1 EN 60947-5-1 UL 508 UL 121201 DNVGL-CG-0339 Temperature Class D – not certified Humidity Class B – not certified Vibration Class B – not certified EMC Class A – not certified Enclosure Class A – not certified

Equipment/Spare parts

Accessories	Jumper comb 6 A (VE 10) 2-pin: 762802 (red), 762803 (white), 762804 (blue) 3-pin: 762805 (red), 762806 (white), 762807 (blue) 4-pin: 762812 (red), 762813 (white), 762814 (blue) 8-pin: 762822 (red), 762823 (white), 762824 (blue) 16-pin: 762832 (red), 762833 (white), 762834 (blue) Laser label 4.23×11 mm (sheet with 1056 labels), Part-No. 681034, PU: 1 unit Marker holder 4×11 mm white, Part-No. 681313, PU: 100 units
-------------	--

Technical data sheet


Interface Technology · Microcompact temp./analog converter

Notes and Comments


Note

For the parameterization you need the USB service cable, LCON ZB USB, part number 750894 and the software Lütze HART-DTM and PACTware. The current versions can be found in the download area of the respective product page on the LÜTZE website.


Dimensions

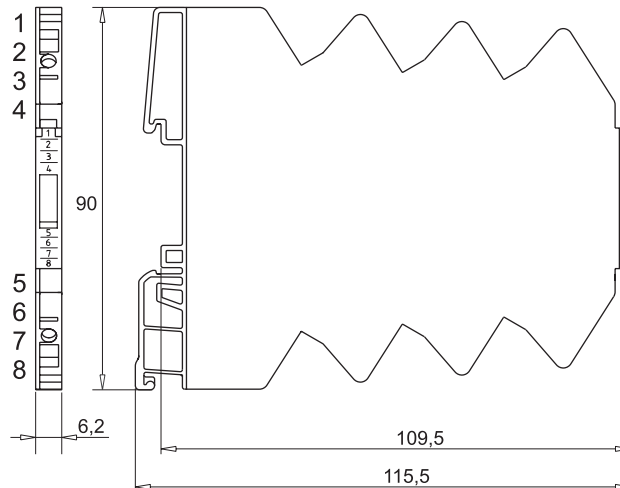

PIN assignment

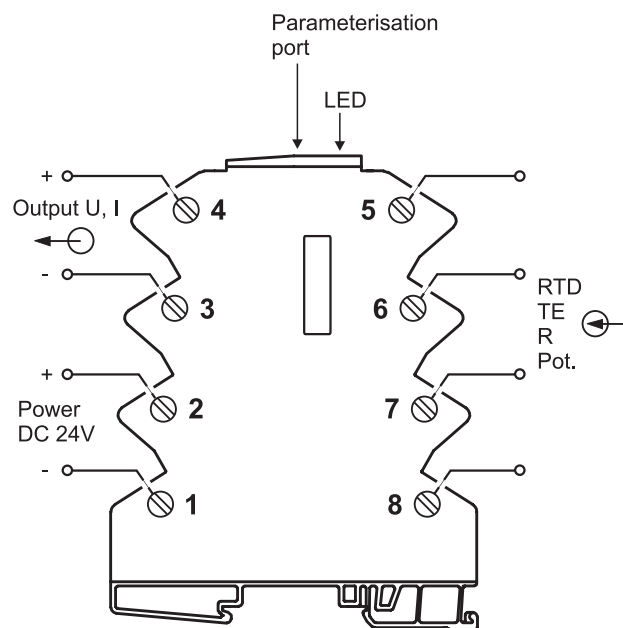

PIN assignment

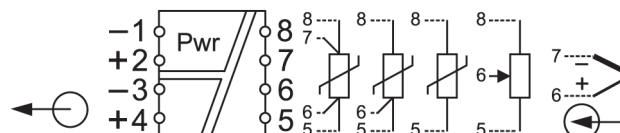

Technical data sheet

Interface Technology · Microcompact temp./analog converter

Range adjustment

Range*		S1				S2							
Start		7	8	1	2	End	3	4	5	6	7	8	
-200°C	●					0°C	●						
-150°C	●	●				50°C		●	●				
-100°C	●		●			100°C	●	●		●			
-50°C			●	●		150°C	●		●	●			
0°C	●	●	●	●		200°C	●	●	●	●			
						250°C	●					●	
						300°C	●	●				●	
Pt100		●				350°C	●		●		●		
Pt1000			●			400°C	●	●	●		●		
TE J	●	●				450°C	●			●	●		
TE K				●		500°C	●	●		●	●		
Pot. %	●	●	●			550°C	●		●	●	●		
						600°C	●	●	●	●	●		
						650°C	●					●	
0 – 20mA	●					700°C	●	●				●	
4 – 20mA			●			750°C	●		●			●	
0 – 10V	●	●				800°C	●	●	●			●	
±10V				●		850°C	●			●		●	
						900°C	●	●		●		●	
						950°C	●		●	●		●	
						1000°C	●	●	●	●		●	
						1050°C	●				●	●	
						1100°C	●	●			●	●	
						1150°C	●		●		●	●	
						1200°C	●	●	●		●	●	
						1250°C	●			●	●	●	
						1300°C	●	●		●	●	●	
						1350°C	●		●	●	●	●	
						1400°C	●	●	●	●	●	●	
● → Switch On													

S1-S2 1-8 off:
FDT/DTM

*See instruction
leaflet