


Technical data sheet

PUR motor cables · C-track compatible · shielded

LUTZE SUPERFLEX® PLUS (C) PUR 0.6/1kV

For highest requirements

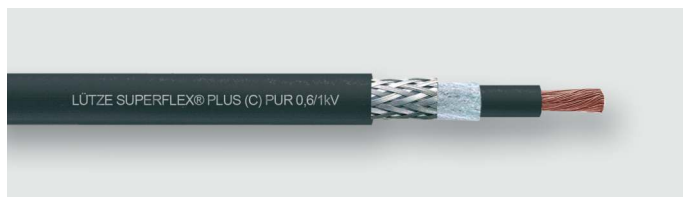

Identification

Type SU+ (C) PUR (1×50) 1KV SW
Part No. [111293](#)

Product version

Datasheet version 00

Use/Application/Properties

- | | |
|-------------|--|
| Application | <ul style="list-style-type: none">• Performance conductor, specifically for machine and device engineering, transport and conveyor technology• As motor supply or grounding cable• Through full PUR jacket and TPE conductor insulation optimally suited for c-tracks, extremely harsh operating conditions and aggressive coolants and lubricants• Especially for industrial environments, machines and plants |
| Properties | <ul style="list-style-type: none">• Very good alternating bending strength• Low adhesion, abrasion-resistant, nick-resistant, tear-resistant• Hydrolysis-resistant, microbe-resistant, and rot-resistant• Weathering, ozone and UV resistant (normal lighting conditions)• Industrial and salt water resistant• Excellent coolant and lubricant resistance• Largely resistant to oils, greases, alcohol-free benzines and kerosene• Silicone free |

Construction

Description	SUPERFLEX® PLUS (C) PUR 0.6/1 kV
Number of conductors/cross-section	(1×50)
Number of conductors	1
Cross-section, metric	50 mm ²
Cross-section AWG	AWG 1
Jacket material	PUR
Jacket color	black similar to RAL 9005

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0
www.lutze.com • sales.gb@lutze.co.uk

Germany: Friedrich Lütze GmbH

Postfach 12 24 (PLZ 71366) • Bruckwiesenstraße 17-19 • D-71384 Weinstadt
Tel. +49 (0)7151 6053-0
www.luetze.de • info@luetze.de

Technical data sheet

PUR motor cables · C-track compatible · shielded

Outer Ø	15.8 mm
Outer Ø	0.622 inch
Surface	adhesion-free
Weight	63.1 kg/100 m
Weight	424 Lbs/Mft
Cu-Index	53.1 kg/100 m
Cu-Index	356 Lbs/Mft
Cable construction	With CU shield, black

Construction Element 1

Element construction	(1×50)
Conductor	CU-wire bare
Conductor category	IEC 60228, Class 6 Superfinely stranded DIN VDE 0295 Class 6
Conductor marking standard	DIN VDE 0293
Conductor insulation	Special TPE

Overall construction

Overall shield	Braid shield Tinned copper wires Optical cover approx. 85 %
Jacket characteristics	Flame-retardant Oil resistant Grease-resistant Petrol-resistant (alcohol-free) Kerosene-resistant Silicone free Halogen free

Technical data

Rated voltage U_0/U	600/1000 V
Test voltage type	AC 4000 V
Temperature range moving	-25 °C ... +80 °C
Temperature range fixed	-40 °C ... +80 °C
Minimum bending radius moving	7.5×D
Minimum bending radius fixed	6×D
Bending cycles	≥10 Mio
Speed	300
Acceleration	50 m/s ²
Torsion	± 30°/m

Technical Data Element 1

Element construction	(1×50)
Insulation resistance at 20 °C	≥200 MΩ×km
Operating capacitance wire-shield	approx.600 pF/m

Technical data sheet

PUR motor cables · C-track compatible · shielded

Certifications/Standards

Certifications	cURus
UL style	AWM 10587
Conformity	CE RoHS REACH TSCA
Burning behavior according to	VDE 0482-332-1-2 DIN EN 60332-1-2 IEC 60332-1 UL 1581 cable flame UL FT1
Oil resistant according to	UL 4d100C VDE 0282 T 10 DIN EN 60811-404
Halogen free according to	DIN EN 60754-1 IEC 60754-1

General

Note	CE These products are in conformity with the EU Low Voltage Directive 2014/35/EU
------	--