

Technical data sheet

Load monitoring · LCOS accessories

Insulated power bridge
AC/DC 500 V/16 A per phase
1-pin



Identification

Type	LCOS-ZB-PB-01-00
Part No.	780961.001.3

Product version

Datasheet version	00
-------------------	----

Description

System Components	Accessories
Description	Power bridge 1-pole, insulated

General

Material	PA6.6 (UL 94 V0, NNF I2, F2)
Operating voltage	Max. AC/DC 500 V
Operating current	Max. AC/DC 16 A/phase
System current max.	AC/DC 64 A
Mounting	Latches into position On LCOS function carrier 22.5 mm or 35 mm
Contact material	CuCrSiTi
Degree of protection	IP20 (EN 60529)
Pole number	1
Weight/unit	0.02 kg
PU (units)	50

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0
www.lutze.com • sales.gb@lutze.co.uk

Germany: Friedrich Lütze GmbH

Postfach 12 24 (PLZ 71366) • Bruckwiesenstraße 17-19 • D-71384 Weinstadt
Tel. +49 (0)7151 6053-0
www.luetze.de • info@luetze.de

14.10.2024 • Subject to technical modification

Part No. [780961.001.3](#) • Datasheet version: 00

page 1 of 3



SYSTEMATIC TECHNOLOGY

Technical data sheet

Load monitoring · LCOS accessories


General ambient conditions

Operation temperature range	-40 °C ... +85 °C
Storage temperature range	-40 °C ... +85 °C
Relative air humidity	5 – 95 %, no defrosting
Vibration resistance	4 g acc. to EN 60068-2-8
Shock resistance	15 g 11 ms acc. to IEC 60068-2-27


Certifications/Standards

Certifications	UR
Standards	IEC 60068-2-42, 43, 8, 27 EN 60064-1 EN 50175 EN 50124-1

Dimensions

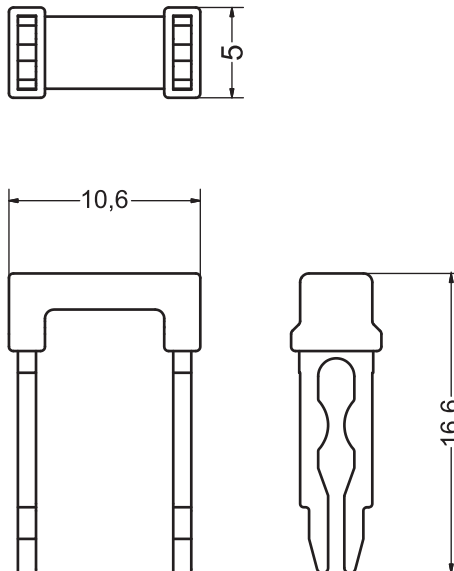

Use

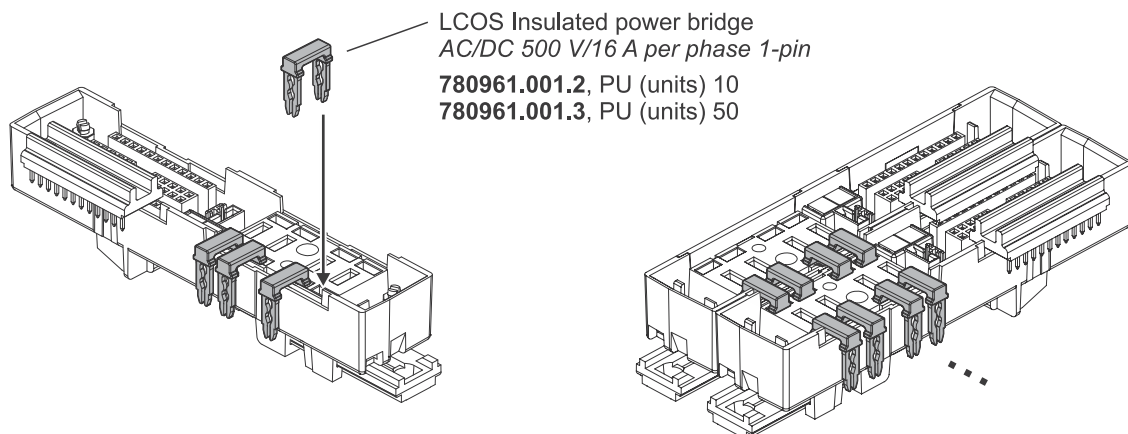

Technical data sheet

Load monitoring · LCOS accessories

Use

