


Technical data sheet

PUR servo cables · C-track compatible · shielded

LÜTZE SUPERFLEX® PLUS M (C) PUR HYBRID SERVO 0,6/1 kV

Combined power supply cable for servo motors with Hiperface DSL® interface

For the highest of standards

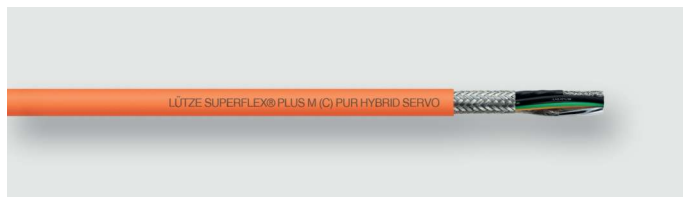

Identification

Type SU+ M(C)PUR HY(4G1,0+(2×0,75)+(2×AWG22))

Part No. [111630](#)

Product version

Datasheet version 03

Use/Application/Properties

Application	<ul style="list-style-type: none">• Combined power supply cable with motor supply, brake and digital feedback especially for SERVO drives in machine and plant construction, transport and conveyor technology• Through full PUR jacket and TPE / HGI conductor insulation optimally suited for c-tracks, extremely harsh operating conditions and aggressive coolants and lubricants• Especially for industrial environments in mechanical and system engineering
Properties	<ul style="list-style-type: none">• High protection against electromagnetic interferences (EMI)• Braided shield optimised for continuous flexing use• Very good alternating bending strength• Low adhesion, abrasion-resistant, nick-resistant, tear-resistant• Hydrolysis-resistant, microbe-resistant, and rot-resistant• Weathering, ozone and UV resistant (normal lighting conditions)• Industrial and salt water resistant• Excellent coolant and lubricant resistance• Largely resistant to oils, greases, alcohol-free benzines and kerosene• Silicone free

Construction

Description	SUPERFLEX® PLUS M (C) PUR HYBRID SERVO 0.6/1 kV
Number of conductors/cross-section	(4G1.0+(2×0.75)+(2×AWG22))
Number of conductors	8
Cross-section, metric	1 mm²

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0
www.lutze.com • sales.gb@lutze.co.uk

Germany: Friedrich Lütze GmbH

Postfach 12 24 (PLZ 71366) • Bruckwiesenstraße 17-19 • D-71384 Weinstadt
Tel. +49 (0)7151 6053-0
www.luetze.de • info@luetze.de

20.03.2025 • Subject to technical modification

Part No. [111630](#) • Datasheet version: 03

page 1 of 4

Technical data sheet

PUR servo cables · C-track compatible · shielded

Jacket material	TPE-U
Jacket color	orange similar to RAL 2003
Outer Ø	12.4 mm
Outer Ø	0.488 inch
Surface	adhesion-free
Weight	19 kg/100 m
Cu-Index	13.5 kg/100 m
Cable construction	With control pair (black, white) and BUS pair (white, blue)

Construction Element 1

Element construction	4G1.0
Conductor	CU-wire bare
Conductor category	IEC 60228, Class 6 Superfinely stranded DIN VDE 0295 Class 6
Conductor marking	According to system manufacturer
Conductor insulation	Polyolefin
Stranding	Conductors layered construction

Construction Element 2

Element construction	(2×0.75)
Conductor	CU-wire bare
Conductor category	IEC 60228, Class 6 Superfinely stranded DIN VDE 0295 Class 6
Conductor marking	According to system manufacturer
Conductor insulation	Polyolefin
Stranding	Conductors stranded in pairs
Wrapping	Transparent plastic film
Element shielding	Braid shield tinned copper wires optical cover approx. 85%

Construction Element 3

Element construction	(2×AWG22)
Conductor	CU-wire bare
Conductor category	IEC 60228, Class 6 Superfinely stranded DIN VDE 0295 Class 6
Conductor marking	According to system manufacturer
Conductor insulation	Polyolefin
Stranding	Conductors stranded in pairs
Element shielding	Foil shield Braid shield tinned copper wires optical cover approx. 85%

Technical data sheet

PUR servo cables · C-track compatible · shielded

Overall construction

Overall stranding	Elements stranded together
Overall wrapping	Non-woven material
Inner jacket	TPE
Overall shield	Braid shield Tinned copper wires Optical cover approx. 85 %
Jacket characteristics	Flame-retardant Oil resistant Halogen free Silicone free

Technical data

Rated voltage U_0/U	600/1000 V
Rated voltage UL	1000 V
Test voltage type	AC 3000 V
Temperature range moving	-40 °C ... +80 °C
Temperature range fixed	-40 °C ... +80 °C
Minimum bending radius moving	7.5×D
Minimum bending radius fixed	5×D
Bending cycles	≥10 Mio
Speed	≤5 m/s
Acceleration	≤50 m/s ²
Torsion	± 30°/m

Technical Data Element 1

Element construction	4G1.0
Insulation resistance at 20 °C	≥500 MΩ×km

Technical Data Element 2

Element construction	(2×0.75)
Insulation resistance at 20 °C	≥500 MΩ×km

Technical Data Element 3

Element construction	(2×AWG22)
Insulation resistance 20 °C	≥500 MΩ×km
Operating capacitance wire-wire	approx.45 pF/m
Impedance	nom.110 Ω

Certifications/Standards

Certifications	cURus
UL style	AWM 21223

Technical data sheet

PUR servo cables · C-track compatible · shielded

Conformity	CE RoHS REACH
Burning behavior according to	IEC 60332-1-2 DIN EN 60332-1-2 VDE 0482 322-1-2 UL 1581 part 1080 VW-1 UL FT1
Oil resistant according to	UL 1581 DIN EN 60811-404
Halogen free according to	IEC 60754-1

General

Note	CE These products are in conformity with the EU Low Voltage Directive 2014/35/EU
------	--