

Technical data sheet

Actuator sensor interface · M12 / M12 - cables

Male M12 straight to female M12 angled with PUR cable

Self-locking screw connection

C-track compatible, halogen free



Identification

Type STG4-M12/KUW4-M12 0,6M PUR

Part No. [418006](#)

Product version

Datasheet version 00

Use/Application/Properties

- | | |
|------------|--|
| Properties | <ul style="list-style-type: none">• Silicone free• Free from paint wetting disruptive substances (LABS-free)• Hydrolysis-resistant, microbe-resistant, and rot-resistant• Resistance to acids, alkalines and watery solutions |
|------------|--|

General

Design	M 12×1/M 12×1
Form male 1	M 12 male straight
Form male 2	M 12 female angle connector
Rated insulation voltage	320 V
Test voltage	2500 V
Degree of pollution	3
Insulation resistance	>1000 MΩ
Contact resistance	<5 mΩ
Flamability according to UL 94	HB
Degree of protection	IP65/67/68
Housing material	TPU
Color of the housing	black

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk

Germany: Friedrich Lütze GmbH

Postfach 12 24 (PLZ 71366) • Bruckwiesenstraße 17-19 • D-71384 Weinstadt
Tel. +49 (0)7151 6053-0 • Fax +49 (0)7151 6053-277(-288)
www.luetze.de • info@luetze.de

02.08.2023 • Subject to technical modification

Part No. [418006](#) • Datasheet version: 00

page 1 of 3



SYSTEMATIC TECHNOLOGY

Technical data sheet

Actuator sensor interface · M12 / M12 - cables

Contact material	CuSn, gold-plated
Thread material	Zinc die-casting, nickel-plated
Material sealing ring	NBR
Mounting	Breakaway torque 0.4 Nm
Number of conductors/cross-section	4 × 0.34 mm ² (42 × 0.1)
Number of conductors	4
Jacket material	PUR
Jacket color	black
Conductor insulation	PP
Cable diameter	4.1 mm
Minimum bending radius moving	10×D
Storage temperature range	-30 °C ... +90 °C
Temperature range connector	-25 °C ... +90 °C
Temperature range fixed	-40 °C ... +80 °C
Temperature range moving	-25 °C ... +80 °C
C-track chain properties	Type B
Conduction properties (TYPE A+B+C)	PUR halogen free for extreme demands Very good chemical stability Very resistant to oils and lubricants Very high abrasion resistance Halogen free Silicone free, free of paint wetting impairment substances Resistant to microbes and hydrolysis Good UV stability
Weight/unit	0.06 kg
PU (units)	1

Technical data

Rated voltage U _N	AC/DC 24 V
Operating voltage max.	250 V
Rated current	4 A
Pole number	4
Cable length	0.6 m
Coding	A

Certifications/Standards


UV-resistant according to	DIN EN ISO 4892-2-A
Certifications	cULus Listed (E224249)

Equipment/Spare parts


Accessories

Torque setting tool M 12: Part-No. 490091 | DM-SET M12 | PU: 1 unit

Dimensions

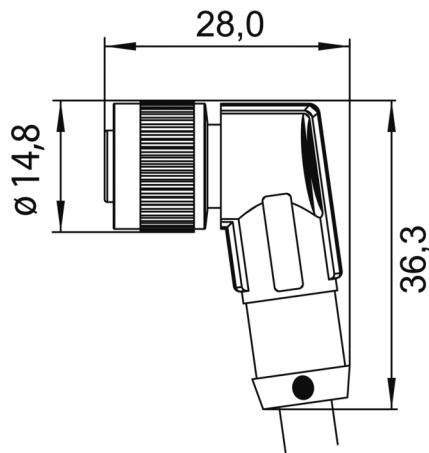

Dimensions

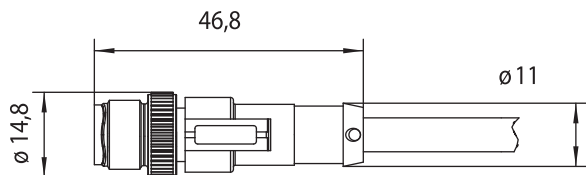

PIN assignment

