

Technical data sheet

Actuator sensor interface · RJ45 connector

Industrial connector RJ45

Solid metal housing, quick-connect technology AWG 27–22

Cat.6A, 4 levels cable clamp, protective cover pre-assembled



Identification

Type	RJ45-M 8pol. Cat.6A T568A
Part No.	490129

Product version

Datasheet version	00
-------------------	----

General

Design	RJ45
Form male 1	RJ45 straight shielded
Degree of pollution	1
Insulation resistance	>500 MΩ
Contact resistance	<20 mΩ
Flamability according to UL 94	V0
Degree of protection	IP20
Housing material	Zinc die-casting
Color of the housing	silver
Color	black
Cover	PBT black
Contact material	Spring steel gold-plated
Strand diameter	1 mm – 1.6 mm
Cable diameter	5 mm – 9 mm
Operation temperature range	-40 °C ... +70 °C
Storage temperature range	-40 °C ... +70 °C
Dimensions (w × h × d)	13.8 mm × 16.2 mm × 53.1 mm
Mechanical service life	>750 insertion cycles
Cross-section AWG	24/1-22/1, 27/7-22/7
Connection type	8-pin RJ45 Push-through contacts IDC
Weight/unit	0.025 kg

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

12.01.2024 • Subject to technical modification

Part No. [490129](#) • Datasheet version: 00

page 1 of 3



SYSTEMATIC TECHNOLOGY

Technical data sheet

Actuator sensor interface · RJ45 connector

PU (units) 1

Technical data

Rated voltage U_N	30 V
Rated current	≤ 1 A
Pole number	8
Bandwidth	500 MHz
Transfer rate	10 Gbit/s
Category	Cat.6A
Contact type	Penetration contact
Shielding	shielded


Approvals/Standards

Approvals	cULus Listed (E326112)
Standards	IEC 60603-7-51

Notes and Comments

Comments	Suitable for Profinet, SERCOS3, Ethercat, Ethernet/IP, Powerlink, VARAN, Power over Ethernet+ (PoE+IEEE 802.3at) Suitable cables, see overview assignment Ethernet cables to connectors
----------	---

Dimensions

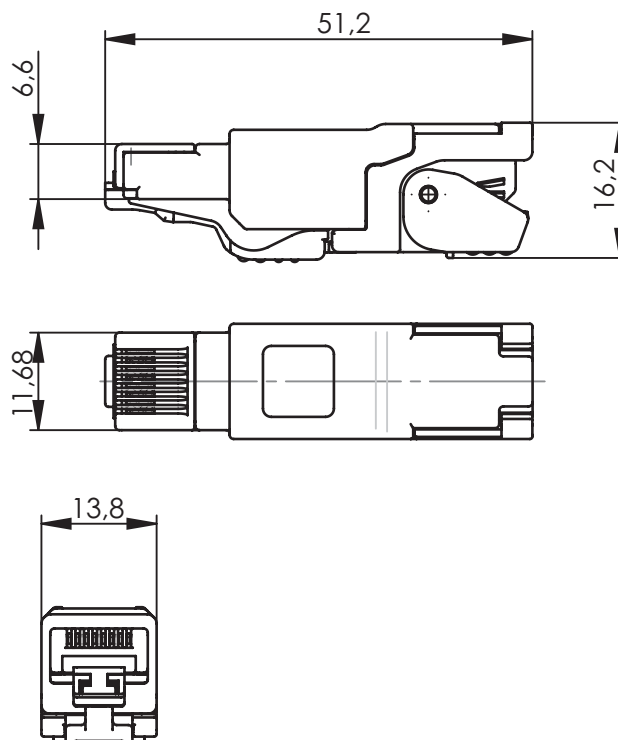

Technical data sheet

Actuator sensor interface · RJ45 connector

Connection assignment

RJ45 male
Ethernet T568A

