


Technical data sheet · Module AirSTREAM

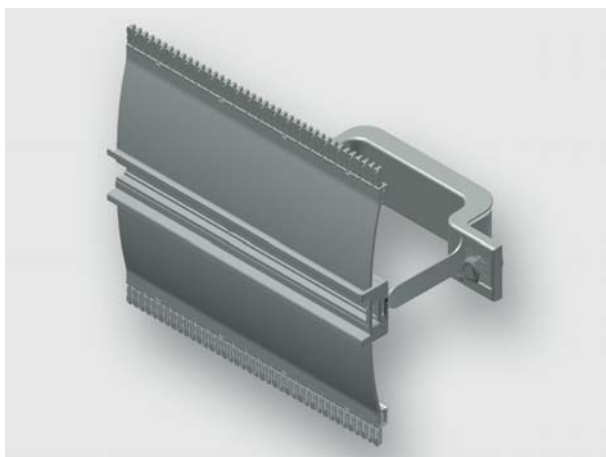

Standard module, pre-assembled from rail type
HS and mounting bracket

Identification	Type	HS160 0900-0900 BI30-085
	Part-No.	380106M0006
Description		
Module type	HS160	
Description	DIN rail HS module profile: The standard module HS is used for mounting of components which are suitable for mounting on DIN rails. The module contains a rail with a 7,5 mm high and 35 mm wide DIN rail with screw channel, standard combs, two mounting brackets with insulation and edge protection. The HS module is available with a rail heights of 40 and 160 mm.	
Technical data		
for frame width	900 mm	
Frame width	900 mm	
Frame depth	120 mm	
Rail height	160 mm	
Rail length	900 mm	
Distance	50 mm	
Bracket width	30 mm	
Wiring space	85 cm ²	
Top comb	Ja	
Bottom comb	Ja	

10.10.2019 – Subject to technical modification

Part-No. 380106M0006

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2

www.lutze.com • sales.gb@lutze.co.uk




SYSTEMATIC TECHNOLOGY

Technical data sheet · Module AirSTREAM

General

Material	Aluminum
Surface	bright

Dimensions

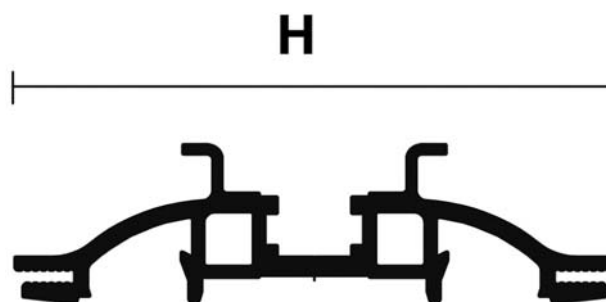

H 160 mm

10.10.2019 – Subject to technical modification

Part-No. 380106M0006

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2

www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY