

Technical data sheet

Suppression Technology · Valve suppressors

Adjustable male, design A (18 mm), IP67

Ground wire terminator (PE) adjustable in 90° steps, IP67

Protection device: without circuit



Identification

Type	L-V20-5801 AC/DC 0-230V
Part No.	705801

Product version

Datasheet version	00
-------------------	----

Technical data

Type of function	Valve suppressor
Protection device	None protection device
Rated voltage U_N	AC/DC 0–230 V
Nominal voltage range	AC/DC 0 V – 230 V
Connecting lead $\varnothing$	4 – 9 mm

General

Design	A (18 mm)
Amperage range	≤ 10 A
Contact resistance	< 15 m Ω
Insulation resistance	> 100 M Ω
Pole number	3
Housing material	PA
Color of the housing	black
Contact material	CuZn silver-plated
Material seal	NBR
Material sealing ring	NBR
Mechanical service life	> 100 insertion cycles

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk

Germany: Friedrich Lütze GmbH

Postfach 12 24 (PLZ 71366) • Bruckwiesenstraße 17-19 • D-71384 Weinstadt
Tel. +49 (0)7151 6053-0 • Fax +49 (0)7151 6053-277(-288)
www.luetze.de • info@luetze.de

10.11.2021 • Subject to technical modification

Part No. 705801 • Datasheet version: 00

page 1 of 3

Technical data sheet


Suppression Technology · Valve suppressors

Degree of pollution	3
Protection class	IP67
Mounting	Breakaway torque 0.4 Nm
Connection type	Screw terminal
Connection cross-section	max. 1.5 mm ²
Connection cross-section	max. AWG 16
Operation temperature range	-40 °C ... +90 °C
Storage temperature range	-40 °C ... +90 °C
Dimensions (w × h × d)	26.8 mm × 28.8 mm × 50.0 mm
Weight/unit	0.023 kg
PU (units)	1

Certifications/Standards

Certifications	cURus (E256031)
Standards	EN 175301-803 ISO 4400

Dimensions

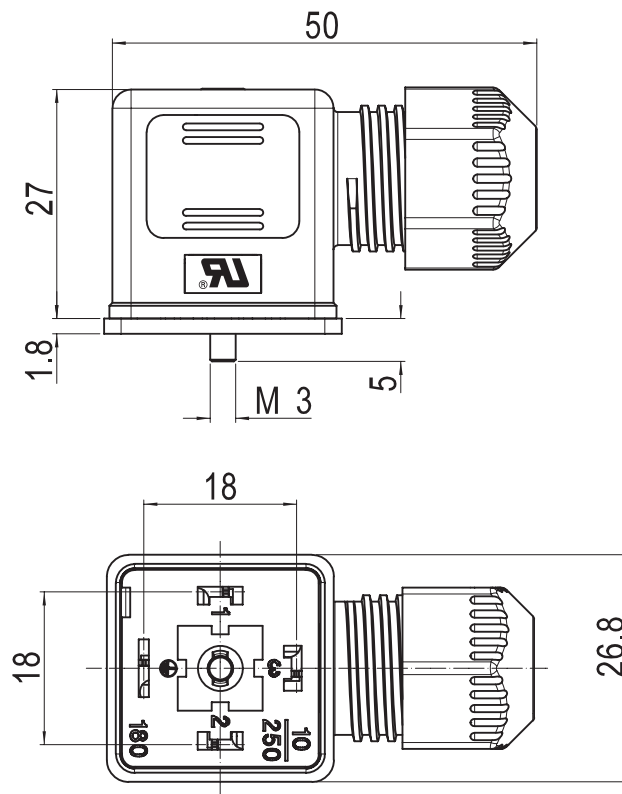

Technical data sheet

Suppression Technology · Valve suppressors

PIN assignment

