


## Technical data sheet

### Flexible Single Conductor Hook Up Wire · Multi-Norm

#### LUTZE Single Conductor Hook Up Wire With UL/CE/MTW and HAR Approvals

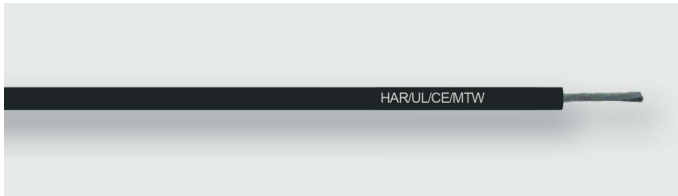

#### Identification

Type EA HAR-UL 1×2,5 RT  
Part No. [A61404](#)

#### Product version

Datasheet version 00

#### Use/Application/Properties

Application

- Multi-rated single-conductor cable for wiring cabinets and use in electrical and electronic equipment
- Specially suited for machines exported to Europe (HAR) and North America (UL MTW)
- MTW Machine Tool Wire

Properties

- Fine stranding class 5, per VDE 0295
- Very flexible for easy installation
- Conditionally resistant to oils, solvents, acids and bases
- Talc free and silicone free

#### Construction

Description SINGLE CONDUCTOR HOOK UP WIRE MULTI-NORM

Number of conductors/cross-section 1×2.5

Number of conductors 1

Cross-section, metric 2.5 mm<sup>2</sup>

Cross-section AWG AWG 14

Jacket color red

Outer Ø 3.7 mm

Outer Ø 0.145 inch

Weight 2.98 kg/100 m

Weight 21

Cu Index 2.4 kg/100 m

Cu Index 16 Lbs/Mft

#### Construction Element 1

Element construction AWG14/1C

Conductor CU-wire tin-plated

#### USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA  
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223  
www.lutze.com • info@lutze.com

13.04.2023 • Subject to technical modification  
Part No. [A61404](#) • Datasheet version: 00

## Technical data sheet

### Flexible Single Conductor Hook Up Wire · Multi-Norm

---

Conductor category	Finely stranded DIN VDE 0295 IEC 60228, Class 5
Conductor marking	red
Conductor insulation	PVC
Conductor insulation standard	UL 1581 Class 43 heat and humidity resistant

---

#### Technical data

---

Rated voltage $U_N$	H05V2-K 300/500 V H07V2-K 450/750 V 600 V UL MTW 600 V UL AWM 105 °C
Test voltage type	AC 3000 V
Temperature range moving	-5 °C ... +105 °C
Temperature range fixed	-40 °C ... +105 °C
Minimum bending radius fixed	5×cable OD

---

#### Technical Data Element 1

---

Element construction	AWG14/1C
Insulation resistance at 20 °C	20 MΩ×km

---

#### Approvals/Standards

---

Approvals	HAR: HD 21.3 S3 UL 1063 MTW Listed UL AWM RoHS REACH
UL style	AWM 1015
Conformity	CE RoHS REACH TSCA
Burning behavior according to	UL VW-1 IEC 60332-1

---

#### General

---

Note	CE These products are in conformity with the EU Low Voltage Directive 2014/35/EU
------	--