


## Technical data sheet

### Suppression Technology · Suppressor for Switched Gear

#### Universal Suppressor Module

Enclosure type: V2

Protection device: RC module



#### Identification

|          |                          |
|----------|--------------------------|
| Type     | LRC-V2-1583 AC 400V 60VA |
| Part No. | 701583                   |

#### Product version

|                   |    |
|-------------------|----|
| Datasheet version | 00 |
|-------------------|----|

#### Technical data

|                         |                              |
|-------------------------|------------------------------|
| Type of function        | Switching device suppression |
| Protection device       | RC module                    |
| Rated voltage $U_N$     | AC 230–400 V                 |
| Rated frequency $f_N$   | 50 Hz / 60 Hz                |
| Holding Capacity        | 60 VA                        |
| Type of connecting lead | 0.5 mm <sup>2</sup> LIY      |
| Cable length            | 0.2 m                        |

#### General

|                      |                                                              |
|----------------------|--------------------------------------------------------------|
| Design               | V2                                                           |
| Potting compound     | 2-components                                                 |
| Conductor color      | black                                                        |
| Housing material     | PA 6.6                                                       |
| Color of the housing | grey                                                         |
| Protection class     | IP67                                                         |
| Mounting             | DIN rail mounting<br>1 snap-on socket<br>Attachment hole m 4 |

#### United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park  
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU  
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2  
www.lutze.com • sales.gb@lutze.co.uk

#### Germany: Friedrich Lütze GmbH

Postfach 12 24 (PLZ 71366) • Bruckwiesenstraße 17-19 • D-71384 Weinstadt  
Tel. +49 (0)7151 6053-0 • Fax +49 (0)7151 6053-277(-288)  
www.luetze.de • info@luetze.de

## Technical data sheet

### Suppression Technology · Suppressor for Switched Gear

|                             |                             |
|-----------------------------|-----------------------------|
| Connection type             | Fork-type cable lug<br>M 4  |
| Operation temperature range | -20 °C ... +60 °C           |
| Storage temperature range   | -20 °C ... +80 °C           |
| Dimensions (w × h × d)      | 15.0 mm × 30.0 mm × 58.0 mm |
| Weight/unit                 | 0.031 kg                    |
| PU (units)                  | 10                          |


#### Certifications/Standards

|                |                 |
|----------------|-----------------|
| Certifications | cURus (E135145) |
|----------------|-----------------|

#### Accessories

|             |                                                                                    |
|-------------|------------------------------------------------------------------------------------|
| Accessories | Snap-on socket type 2, grey: Part-No. 700499   DIN rail mounting   PU:<br>10 units |
|-------------|------------------------------------------------------------------------------------|

#### Dimensions

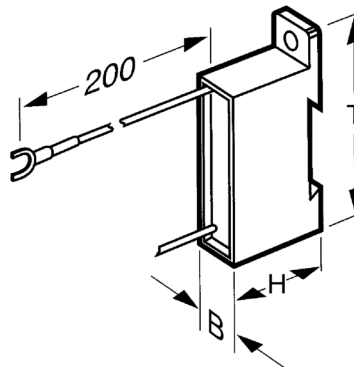

#### PIN assignment

RC element

