

Technical data sheet

Suppression Technology · Valve suppressors

Design C (8mm), 2-pin + 2×PE
PVC connecting lead 3×0,5mm²
With bridged ground conductor (PE)



Identification

Type	LS-C-9659 10m PVC 24V
Part No.	709659

Product version

Datasheet version	00
-------------------	----

Technical data

Type of function	Valve suppressor
Protection device	Suppressor diode + LED
Rated voltage U_N	AC/DC 24 V
Current Consumption	4 mA
Cut-off peak	≤52 V
Rated frequency f_N	50 Hz / 60 Hz
Holding Capacity	70 VA
Type of connecting lead	3×0.5 mm ² PVC
Cable length	10 m
Connecting lead Ø	5.0 ± 0.15 mm

General

Design	C DIN (8 mm)
Status indication	LED yellow
Amperage range	≤3 A
Contact resistance	<10 mΩ
Insulation resistance	>100 MΩ
Pole number	3

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk

Germany: Friedrich Lütze GmbH

Postfach 12 24 (PLZ 71366) • Bruckwiesenstraße 17-19 • D-71384 Weinstadt
Tel. +49 (0)7151 6053-0 • Fax +49 (0)7151 6053-277(-288)
www.luetze.de • info@luetze.de

04.05.2022 • Subject to technical modification

Part No. [709659](#) • Datasheet version: 00

page 1 of 3



SYSTEMATIC TECHNOLOGY

Technical data sheet

Suppression Technology · Valve suppressors

Conductor color	various
Jacket color	black
Housing material	TPU
Color of the housing	transparent
Contact material	CuSn silver-plated
Mechanical service life	>100 insertion cycles
Degree of pollution	3
Degree of protection	IP67
Mounting	Breakaway torque 0.4 Nm Protective hose possible
Temperature range connector	-25 °C ... +90 °C
Temperature range fixed	-30 °C ... +80 °C
Temperature range moving	-5 °C ... +70 °C
Operation temperature range	-25 °C ... +80 °C
Storage temperature range	-40 °C ... +90 °C
Dimensions (w × h × d)	16.0 mm × 25.3 mm × 39.0 mm
Weight/unit	0.52 kg
PU (units)	1

Certifications/Standards

Standards	EN 175301-803 ISO 6952
-----------	---------------------------


Equipment/Spare parts

Accessories Tag holder 7×20 mm, white: Part-No. 760968 | BZT-0720 | PU: 100 units

Notes and Comments

Comments Very good chemical and oil resistance. The material resistance must be checked based on the application for use with aggressive media!

Dimensions

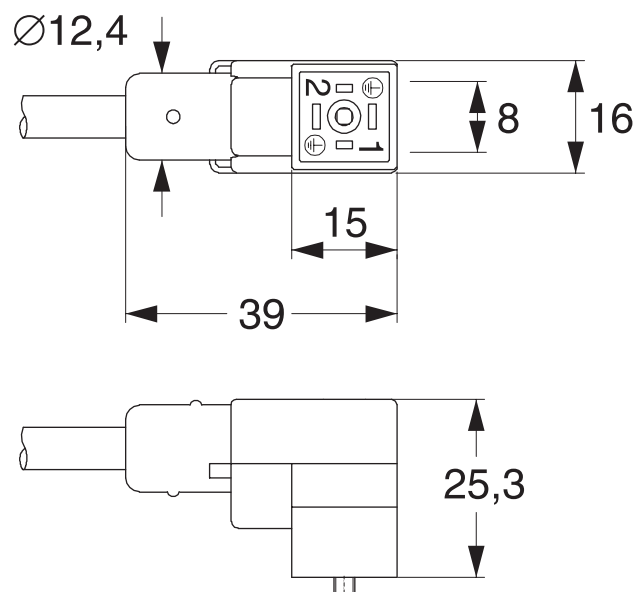

Technical data sheet

Suppression Technology · Valve suppressors

PIN assignment

