

Technical data sheet

Cable fittings and accessories

LÜTZE CABLEFIX® Vario

Rubber modules

Feed-through for all prefabricated cables and wires with connectors



Identification

Type	VARIO VK5
Part No.	606152

Product version

Datasheet version	02
-------------------	----

Use/Application/Properties

Application	• Electrotechnology, pneumatics, hydraulics, robotics, general machine and plant construction
Properties	• Rubber modules for feed through and terminal frames • High flexibility in the application • Additional mounting to existing installation easily possible • Even pressure effect on the feed through round material yields good strain relief and sealing • Compact design i.e. space-saving • 2 module sizes with slot and suspension principle • Very good weathering resistance

Technical data

Dimensions (w × h × d)	40.0 mm × 20.0 mm × 30.0 mm
Number of holes	8
Clamping range D	4.5 – 5.5 mm
Temperature range	-40 °C ... +100 °C

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk

Germany: Friedrich Lütze GmbH

Postfach 12 24 (PLZ 71366) • Bruckwiesenstraße 17-19 • D-71384 Weinstadt
Tel. +49 (0)7151 6053-0 • Fax +49 (0)7151 6053-277(-288)
www.luetze.de • info@luetze.de

20.10.2023 • Subject to technical modification

Part No. [606152](#) • Datasheet version: 02

page 1 of 3

Technical data sheet

Cable fittings and accessories

Construction

Description	LÜTZE CABLEFIX® VARIO VK5
Material	PA6GF15
Material characteristics	UV-resistant ozone-resistant Oil resistant fuel-resistant acid-resistant. alkali-resistant solvent-resistant seawater-resistant
Color	black


General

PU (units)	1
------------	---


Notes and Comments

Note	Unit corresponds to the number of required rubber modules type VK or VG
------	---

Dimensions

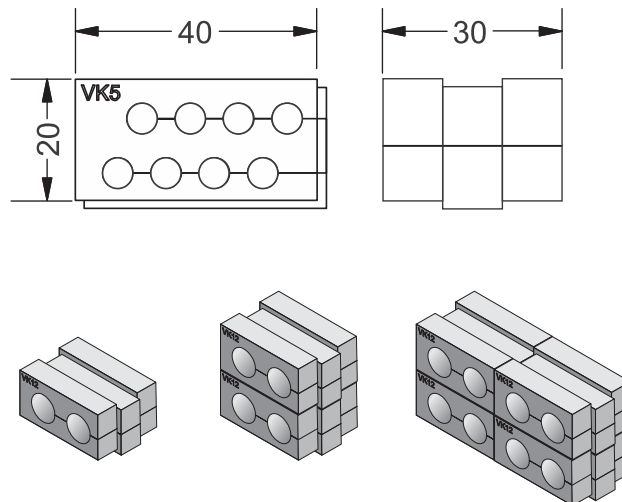

Use

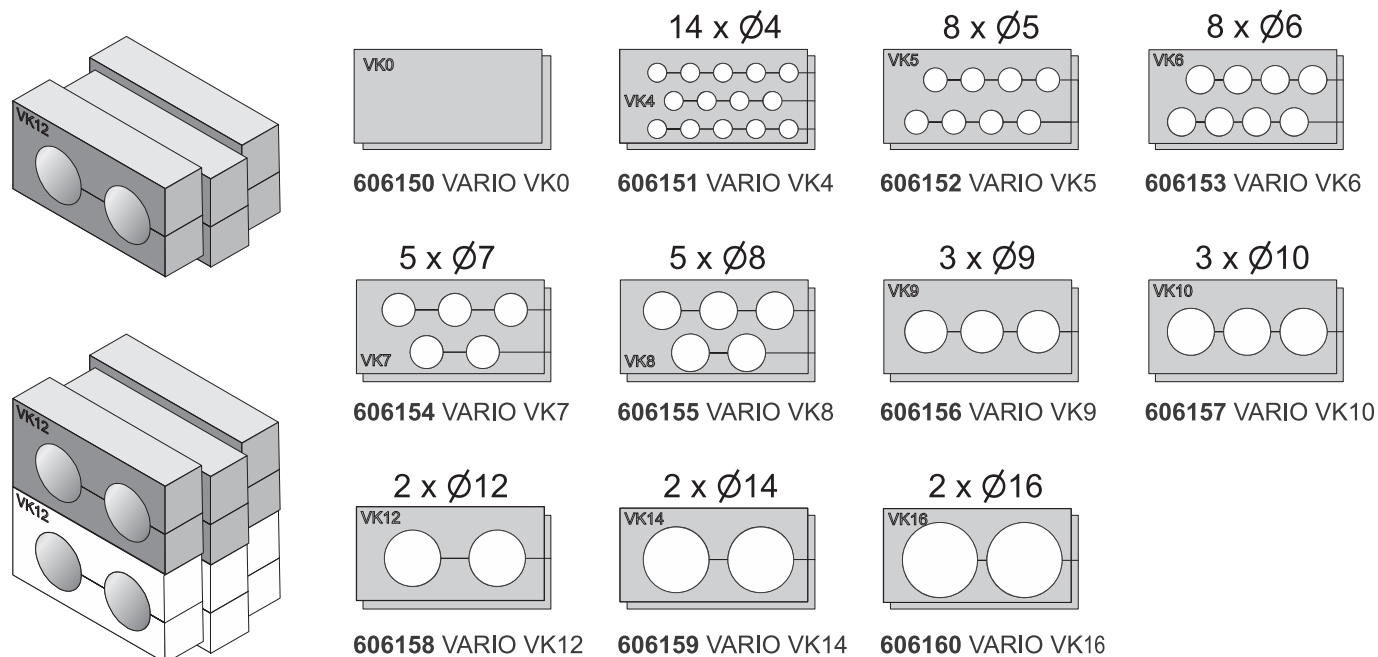

Use

