

Technical data sheet

Interface Technology · LCIS Solid State Relay

Solid state relay, 3-conductor technology, manual off automatic

Switching element max. DC 30 V / 5A

Screw terminal / Push-In



Identification

Type	LCIS-SRKF-DC-3L-200360-SH0S
Part No.	763020.0360

Product version

Datasheet version	03
-------------------	----

Input

Rated voltage U_N	DC 24 V
Load	AC 230 V/0.75 A
Input voltage range	11 V – 30 V
Rated current I_N	8 mA
Protection device Input	Suppressor diode
Status display input	LED green
Interrupting voltage	<6 V

Output

Switching element	MOSFET N/O contact
Min. switching voltage	DC 10 V
Max. switching voltage	DC 30 V
Min. switching current	5 mA
Max. switching current	5 A
Inrush current	20 A/20 ms @ 1 Hz
Leak current	1 mA
Switch-on delay	<0.3 ms

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk

Germany: Friedrich Lütze GmbH

Postfach 12 24 (PLZ 71366) • Bruckwiesenstraße 17-19 • D-71384 Weinstadt
Tel. +49 (0)7151 6053-0 • Fax +49 (0)7151 6053-277(-288)
www.luetze.de • info@luetze.de

15.03.2024 • Subject to technical modification

Part No. [763020.0360](#) • Datasheet version: 03

page 1 of 4

Technical data sheet

Interface Technology · LCIS Solid State Relay

Shutdown delay	<0.4 ms
Protection device	Suppressor diode
Short circuit	Non short-circuit proof
Switching frequency	Max. 100 Hz
Degree of protection	IP20

General

Housing material	PA 6.6 (UL 94 V-0)
Color of the housing	RAL 7012 Basalt grey
Degree of protection	IP20
Mounting	DIN rail mountable TS35 (EN 60715)
Installation position	Any
Insulation voltage input / output	4.0 kV _{eff}
Safe isolation	yes
Clearance/creepage dist. (control/ load side)	>5.5 mm
Connection type	Screw terminal Single wire 0.25 mm ² – 2.5 mm ² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm ² – 1.5 mm ² / AWG 24–16
Strip length	6 mm
Dimensions (w × h × d)	6.2 mm × 93.0 mm × 73.0 mm
Weight/unit	0.03 kg
PU (units)	5

General ambient conditions

Operation temperature range	-25 °C ... +60 °C
Storage temperature range	-40 °C ... +80 °C
Relative air humidity	20 – 90 % RH, not condensing
Vibration resistance	0.7 g acc. to EN 60068-2-6
Shock resistance	15 g acc. EN 60068-2-27


Certifications/Standards

Conformity	CE UKCA
Certifications	cULus (E135145) DNV (TAA000024Y)
Standards	EN 60947-1 EN 60947-5-1 EN 61000-6-2 EN 61000-6-4 UL 508 DNV-CG-0339


Technical data sheet

Interface Technology · LCIS Solid State Relay


Dimensions

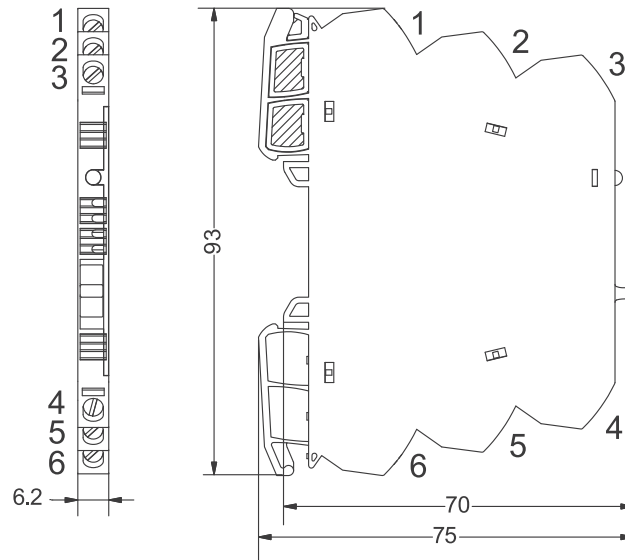


PIN assignment

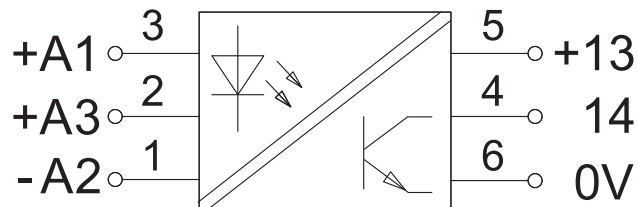


Use

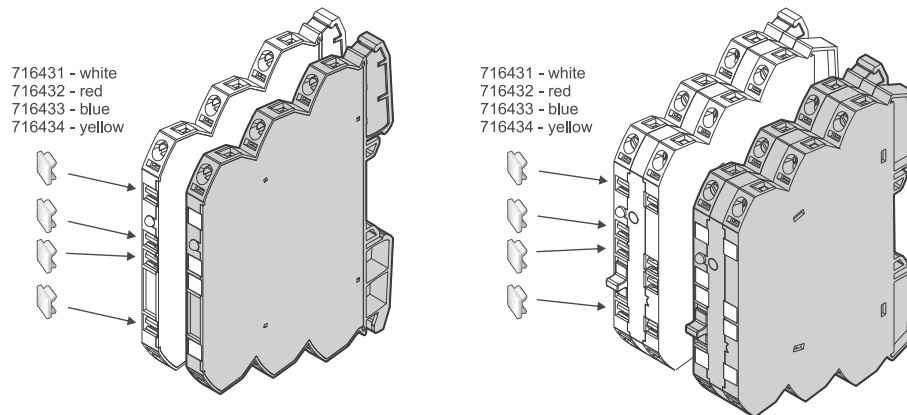

Circuit diagram

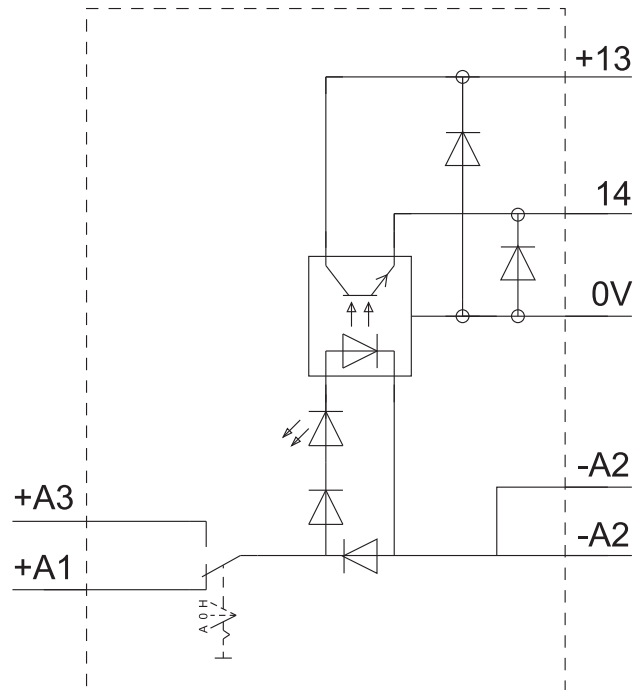

Switch position

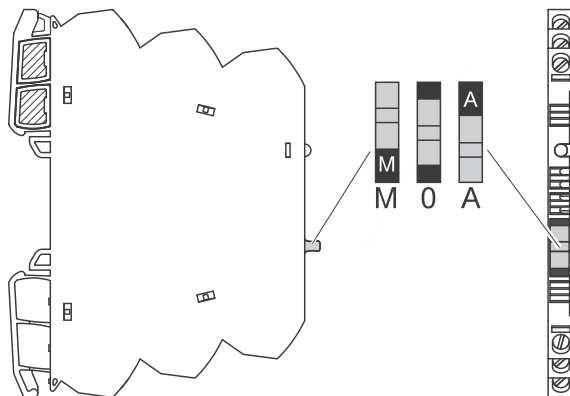

- M:** **DE** Funktion durch A3 bestimmt
EN Function determined by A3
FR Fonction déterminée par A3
- 0:** **DE** Aus
EN Off
FR Éteinte
- A:** **DE** Funktion durch A1 bestimmt
EN Function determined by A1
FR Fonction déterminée par A1