
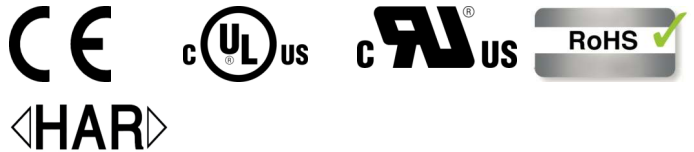


Technical data sheet

Flexible Single Conductor Hook Up Wire · Multi-Norm

LUTZE Single Conductor Hook Up Wire With UL/CE/MTW and HAR Approvals

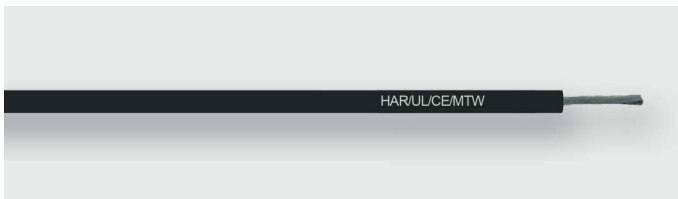

Identification

Type EA HAR-UL 1×6 SW
Part No. [A61001](#)

Product version

Datasheet version 00

Use/Application/Properties

- Application
- Multi-rated single-conductor cable for wiring cabinets and use in electrical and electronic equipment
 - Specially suited for machines exported to Europe (HAR) and North America (UL MTW)
 - MTW Machine Tool Wire
- Properties
- Fine stranding class 5, per VDE 0295
 - Very flexible for easy installation
 - Conditionally resistant to oils, solvents, acids and bases
 - Talc free and silicone free

Construction

Description	SINGLE CONDUCTOR HOOK UP WIRE MULTI-NORM
Number of conductors/cross-section	1×6
Number of conductors	1
Cross-section, metric	6 mm ²
Cross-section AWG	AWG 10
Jacket color	black RAL 9005
Outer Ø	4.8 mm
Outer Ø	0.189 inch
Weight	6.3 kg/100 m
Weight	44
Cu-Index	5.8 kg/100 m
Cu-Index	39 Lbs/Mft

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk

Germany: Friedrich Lütze GmbH

Postfach 12 24 (PLZ 71366) • Bruckwiesenstraße 17-19 • D-71384 Weinstadt
Tel. +49 (0)7151 6053-0 • Fax +49 (0)7151 6053-277(-288)
www.luetze.de • info@luetze.de

13.04.2023 • Subject to technical modification

Part No. [A61001](#) • Datasheet version: 00

page 1 of 2

Technical data sheet

Flexible Single Conductor Hook Up Wire · Multi-Norm

Construction Element 1

Element construction	AWG10/1C
Conductor	CU-wire tin-plated
Conductor category	Finely stranded DIN VDE 0295 IEC 60228, Class 5
Conductor marking	black
Conductor insulation	PVC
Conductor insulation standard	UL 1581 Class 43 heat and humidity resistant

Technical data

Rated voltage U_N	H05V2-K 300/500 V H07V2-K 450/750 V 600 V UL MTW 600 V UL AWM 105 °C
Test voltage type	AC 3000 V
Temperature range moving	-5 °C ... +105 °C
Temperature range fixed	-40 °C ... +105 °C
Minimum bending radius fixed	5×D

Technical Data Element 1

Element construction	AWG10/1C
Insulation resistance at 20 °C	20 MΩ×km

Certifications/Standards

Certifications	HAR: HD 21.3 S3 UL 1063 MTW Listed UL AWM RoHS REACH
UL style	AWM 1015
Conformity	CE RoHS REACH TSCA
Burning behavior according to	UL VW-1 IEC 60332-1

General

Note	CE These products are in conformity with the EU Low Voltage Directive 2014/35/EU
------	--