

Technical data sheet

Mounting Accessories

AirBLOWER Fan Bank



Identification

Type	AirBLOWER
Part-No.	777000.1011

Product version

Datasheet version	01
-------------------	----

Use/Application/Properties

Application	• AirBLOWER fan bank
-------------	-----------------------------

Description

Description	AirBLOWER fan bank with three 24 Vdc axial fans mounts onto the AirSTREAM frame to supply an evenly distributed airflow inside the control cabinet. The control unit LCOS-AB01 can be used to monitor the temperature and control the AirBLOWER fans. The mounting kit must be ordered separately.
Application	Variant 1: Attachment with adapter in the comb nut Variant 2: Fan bench screwed into the HS 60 module

Technical data

Start-up consumption	approx. 40 W for 1 s
Rated voltage U_N	DC 24 V SELV
Rated voltage range	DC 12 V – 28 V
Power consumption	15 W
Mechanical service life	at 40°C up to 72500 h, at max. Temp. up to 30000 h
Min. sound pressure	60 dB (A)
Rotation frequency	2700/min

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk

Germany: Friedrich Lütze GmbH

Postfach 12 24 (PLZ 71366) • Bruckwiesenstraße 17-19 • D-71384 Weinstadt
Tel. +49 (0)7151 6053-0 • Fax +49 (0)7151 6053-277(-288)
www.luetze.de • info@luetze.de

Technical data sheet

Mounting Accessories

Connecting lead

Jacket color	grey RAL 7001
Connections	1(+), 2(-)

General

Dimensions (w × h × d)	370.0 mm × 130.0 mm × 45.0 mm
Operation temperature range	-20 °C ... +75 °C
Weight/unit	1.37 kg (without connection cable)
PU (units)	1


Certifications/Standards

Standards	EN 61131-2:2007, EMV, Zone B EMV according to EN 61131-2 only in combination with 777100.0011 (Control unit for AirBLOWER)
-----------	---

Accessories

Accessories	AirBLOWER Adapter Set (complete set for mounting variant 1) Part-No. 780994.0000 PU: 1 unit
-------------	--

Dimensions

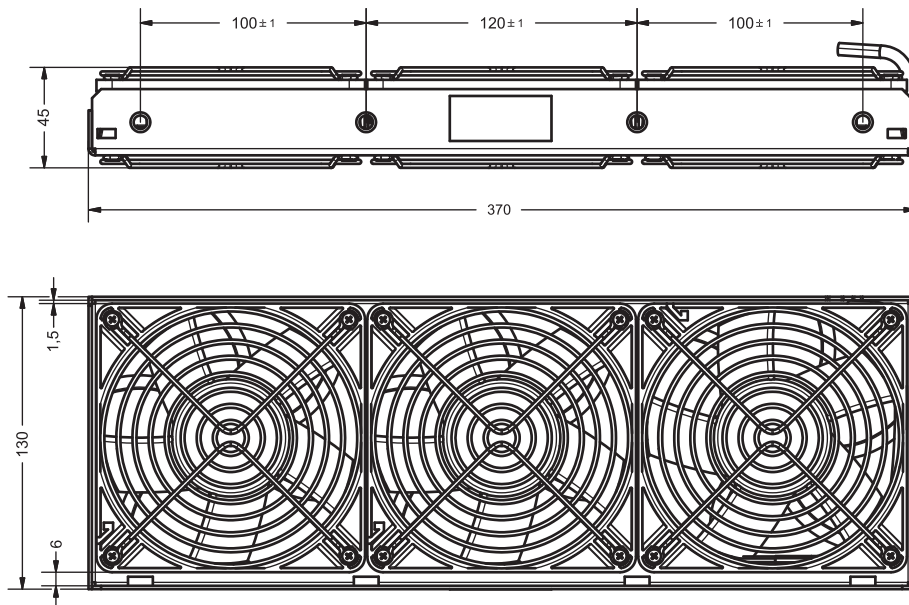

Use

